


MK7

Next Generation Reflow Oven

HELLER-The Thermal Technology Leader in Semicon and SMT

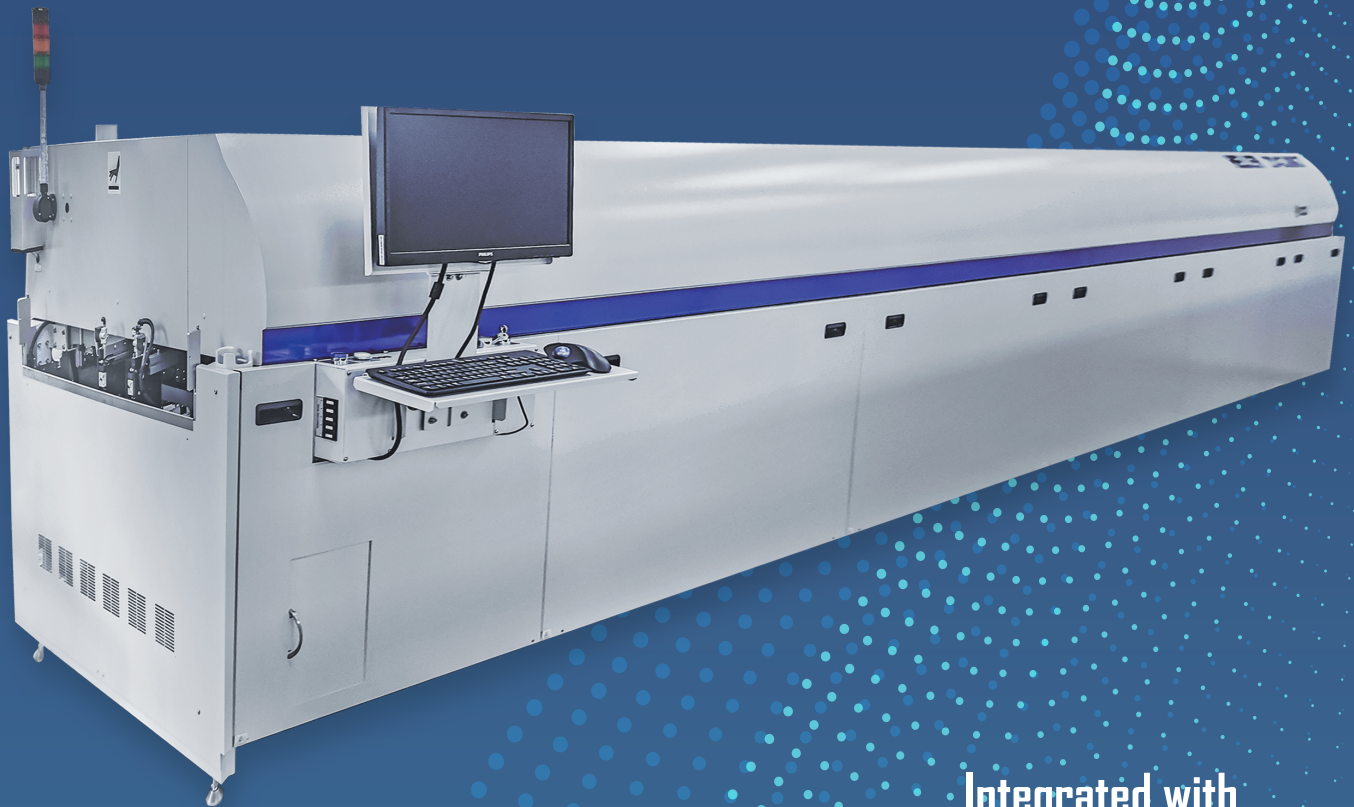

Integrated with
Industry-Leading Thermal Technology


HELLER
INDUSTRIES
THE TECHNOLOGY LEADER



HELLER Korea



HELLER US

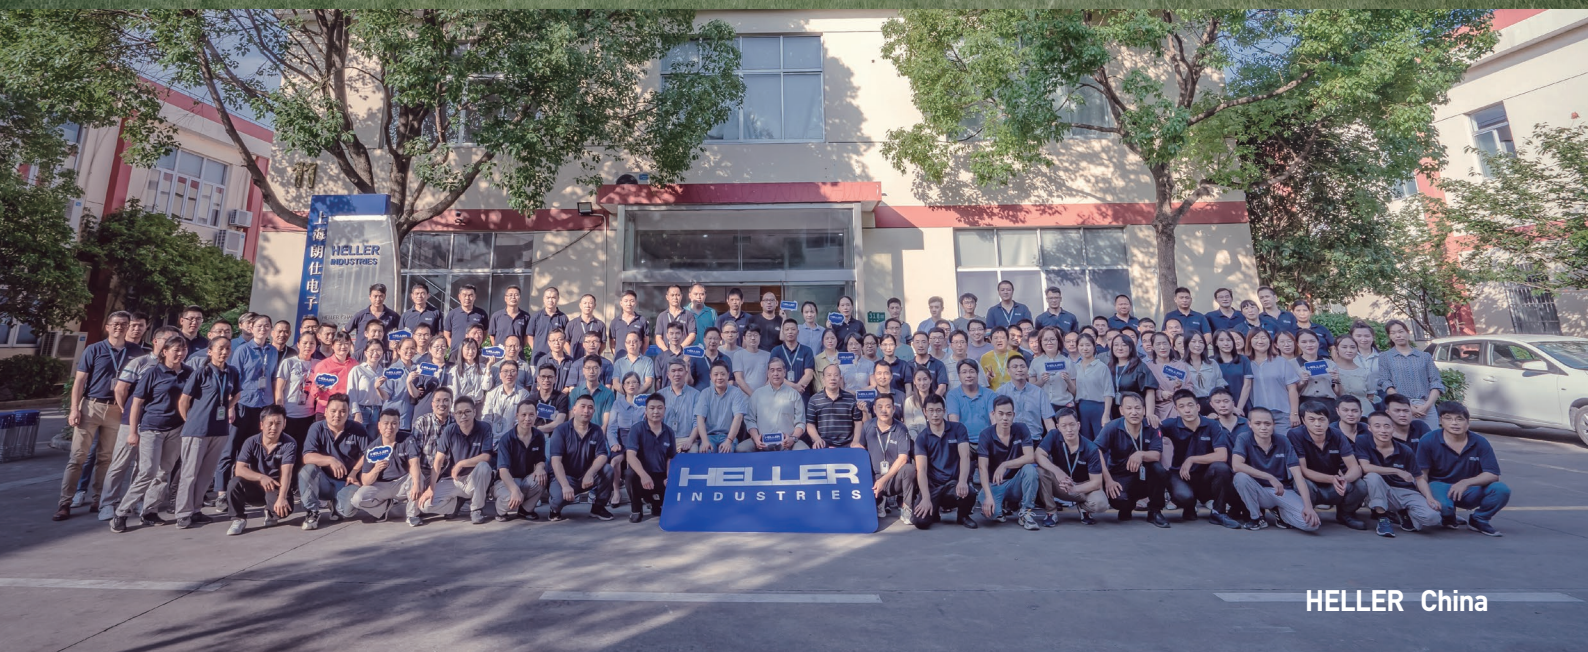

HELLER China

HELLER


| The Thermal Technology Leader in Semicon and SMT

Superior Thermal Performance for Heating and Cooling

The New MK7 platform has revolutionized the reflow industry with several new and groundbreaking designs. The low-profile modules provide lower Delta T while reducing overall energy consumption. New flux management options offer exceptional capability and reduce overall PM times. New cooling systems offer best in class cooling rates and low exit temperatures while providing exceptional thermal separation between zones. We invite you to visit any one of our 3 demo locations to run profiles and see for yourself the strong advantages the MK7 can bring to your process. Or if you prefer, send us your toughest board and we will run profiles and generate the data for you. We are happy to work with you to create a custom configuration to fit your needs.

NEW HEATING SYSTEM


Enhanced low height heater module and large impeller provides the lowest delta T's on product with improved air flow and uniformity!

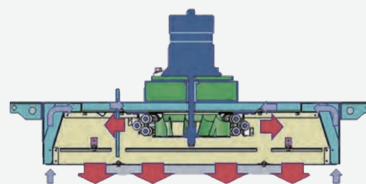


Heating Module

NEW COOLING SYSTEM

A variety of module types and systems are available, tailored to the application including the most demanding lead-free profile requirements. A super cooling system option is available for high mass applications that can provide cooling rates $>6^{\circ}\text{C}/\text{sec}$ and exit temperatures below 50°C .

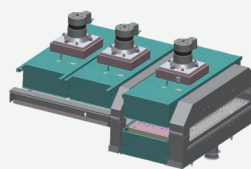

Air Type Cooling Module

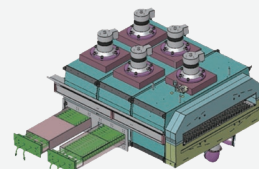


Water Type Cooling Module




Consistent Thermal Profiles & Low Delta T's with Low Energy Consumption

Excellent thermal performance is achieved with improved designs for heating and dynamic control, while energy usage is reduced with improved sealing and insulation. The Energy Management System on MK7 ovens provides smart control when off-loading of production to further save energy consumption.

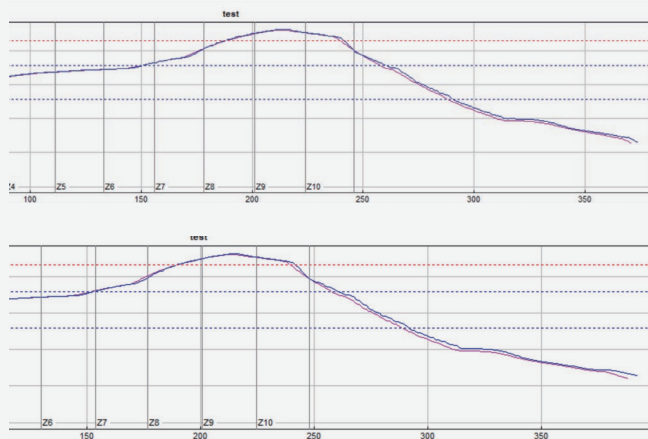

Loading and no loading
Delta T < 2°C

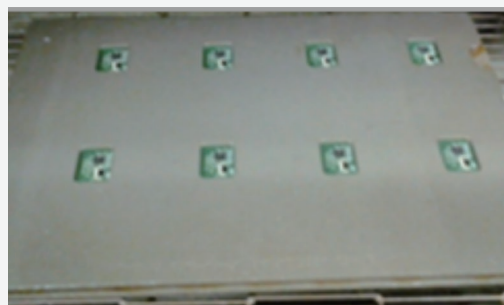

Energy Management System on MK7 ovens provides smart control when the production line is idle to further save energy consumption.



Level 1

Slow down exhaust blower



Level 2

Slow down zone blower
Minimize or stop N2
Slow down chain speed



Level 3

Load Standby recipe



Level 4


Cool down

Standby Mode Results:
~50% kW less
~60% N2 less




New Designs Minimize Preventive Maintenance Effort & Time

Due to the new heat exchanger design with chilled water, the water box flux management system gives superb flux filtration performance while keeping maintenance and cleaning easy during PM. The enlarged capacity of provides longer interval between PM than other flux management systems.

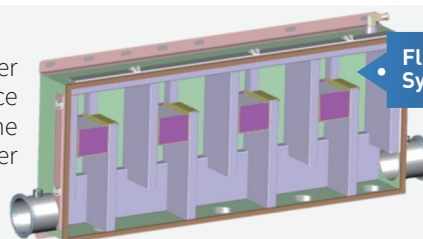


Flux Mgmt.
System -WaterBox

Low temp.
catalyst

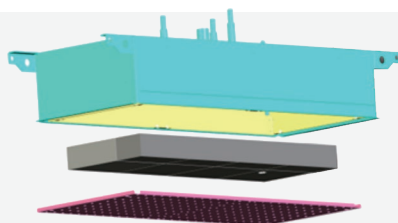

In close cooperation with our advanced materials provider, HELLER's new low temperature catalyst can help remove flux during reflow resulting in a clean process chamber.


Pit-Stop features are an innovative way to reduce PM times by reducing overall oven downtimes. Parts involved with Pit-Stop features can be removed and exchanged without cooling down the oven, so production can be resumed right after the exchange.

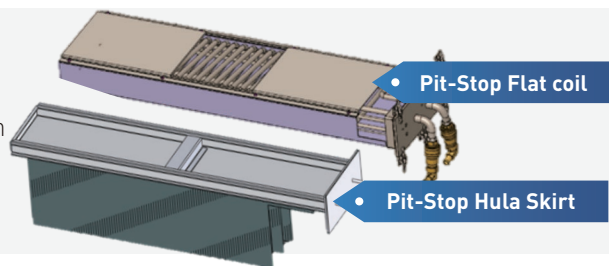


Pit-Stop Flat coil

Pit-Stop Hula Skirt

Quick Release
and Anti-Flux
Dripping Design

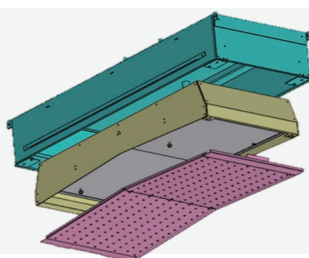


The quick release cooling grill with anti-flux dripping design simplify flux cleanup in the cool zones, further reducing overall PM effort.

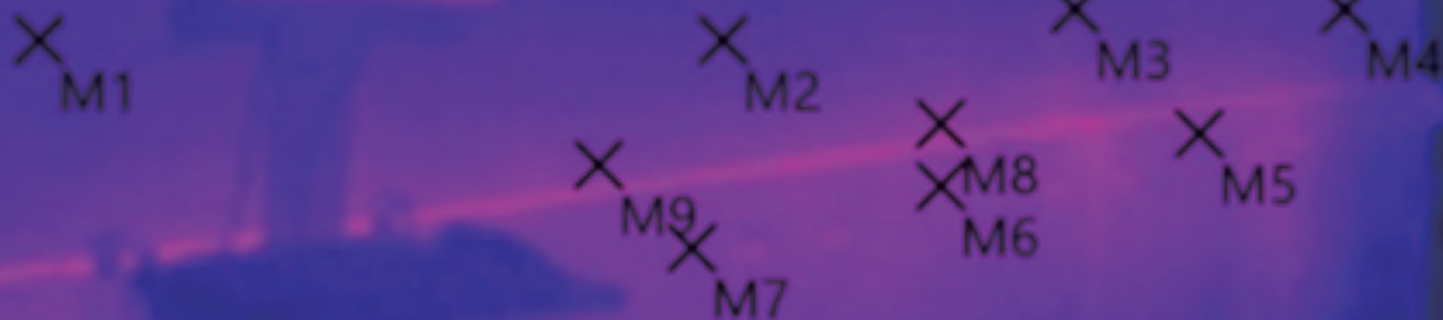

Energy-Efficient Designs for Low Carbon Footprint

Heller takes low-carbon, green and sustainable development as the company's long-term goals, while meeting the technical requirements of customers, and spares no effort to apply green environmental protection technology to products, helping enterprises and the world to achieve carbon peaking goals.



Low Temp. Catalyst

Greater conversion of flux results in lower nitrogen consumption with no need of additional heating source




Energy Mgmt. System

Smart Control for Energy Saving on power consumption and N₂ consumption.

Nitro-Gate

Creative design for N₂ ovens to minimize the N₂ consumption

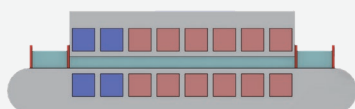

Low Temp. Skin


New frame design and insulation of MK7 to reduce heat loss to save energy.





Smart System for Smart Manufacturing

Digitalization is changing all areas of our lives, and manufacturing is no different. Manufacturing companies must move with this trend by adopting smart manufacturing processes in order to stay competitive. While the ultimate goals of fast delivery, low cost and high quality have remained unchanged, the management and analysis of data from production, process and equipment is now essential. HELLER understands this, and our software tools fully support smart manufacturing and Industry 4.0.

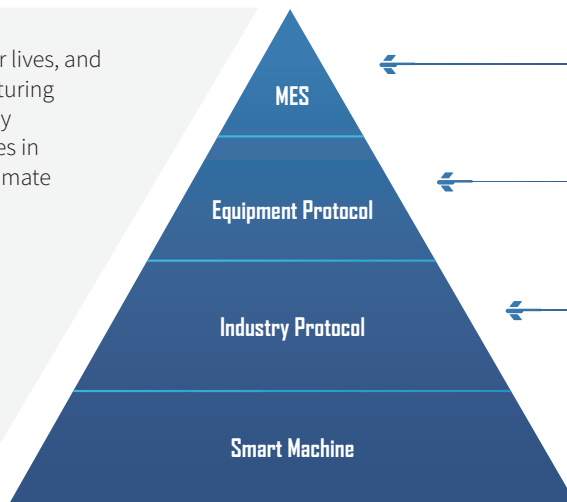

Support Customer MES
HELLER Interface

Support Equipment Protocol
ASM Interface, Pana ILNB, FUJI Link

Support Industry Protocol
IPC Hermes 9852, IPC CFX, SECS/GEM

Smart Machine

- Digitalization for monitoring
- HELLER365 (Traceability)
- Energy Management System

Building Blocks for smart factory

HELLER ovens are smarter ever than before with integrated HW & SW. This enables operators to monitor the process in real-time to quickly improve product quality and yield, while reducing costs. HELLER 365 provides live oven monitoring of the thermal process on board level to ensure they are under control and within spec. All data is saved which allows users to look back at previous production and process data.



HELLER365 (Traceability)



HELLER365

Virtual Profile – Board Level Monitoring

Configurable Designs for Your Application

Electronics Manufacturers demand a high level of productivity—providers are pushed to offer better results while maintaining profitability. To grow your business, you need a flexible system that can accommodate products and applications for SMT and Semicon. The MK7 is capable to serve a wide range of products and applications, giving you a competitive advantage to expand into new lines of business.



Flexible Design

Compatible and configurable for your specific need



Uniform Temp. Profile

Lower delta T's and easily adjusted thermal profile



Fast Heat Transfer

Fast response to heat transfer for any product, delivering the highest soldering quality



Easy PM Effort

Less downtime for more productivity



Low Cons. Cost

Reduced energy and Nitrogen consumption at any PPM level



Ready in Smart Factory

Providing oven data to superior SW for smart data analysis and smart control

High temp uniformity with a flexible combination of heating and cooling zones to best fit your application.

Heated Zones + Cooling Zones

High parallelism, and Low vibration. Single, dual and multiple lane configurations available with options CBS or mesh belt.

Transportation

Heater modules available in either 10" and 12" in length, and either 30" or 34" in width, to meet the needs of different applications.

Heaters and Modules

Cooling system

Efficient cooling system with air cooling and optional water box for extra support.

Flux Management

Boards stay clean and dry with multiple flux management options based on flux consumption, including air, water and pyrolysis.

...And More

Additional options include cleanroom capability (class10k & 1k), heavy mass loading, and high-temp processing (400oC)



Customize your process without standard modular options

MK7 Systems Meet Your Total Requirements

	1505MK7	1707MK7	1809MK7	1810MK7	1826MK7	1913MK7	1936MK7	2043MK7(3C)	2043MK7(4C)
Basic Data									
Length (Air/N ₂ , mm)	2,000/2,500	3,600	4,650	4,650	4,650	5,900	5,900	6,774	7,224
Width (mm)	1,520	1,520	1,520	1,520	1,520	1,520	1,520	1,520	1,520
Height (mm)	1,440	1,440	1,440	1,440	1,440	1,440	1,440	1,440	1,440
Weight (kg)	1,510	1,550	2,060	2,060	2,060	2,520	2,420	3,765	3,765

Power and N₂									
Power Inputs	208/240/380/400/415/440/480 VAC								
Max Current Draw	100Amp					130Amp @ 208/240V 100Amp @ 380/400/415/440/480V			
Continuous Power kW	6 - 8	7 - 12	7.5 - 16	7.5 - 16	8 - 14	9 -15	9 -15	13 - 20	13 - 20
N ₂ Supply Pressure (bar)	5 -7								
N ₂ Operating Pressure (bar)	6								
Typical N ₂ Consumption**	500-700SCFH								

Heating and Cooling									
Heating Zones	5	7	9	10	8	13	10	13	13
Heating Length (mm) (Air/N ₂)	1,340/1,300	1,920	2,580	2,830	2,710	3,570	3,600	4,390	4,490
Cooling Zones*	1	1	2	2	2	3	3	3	4
Cooling Length (mm) (Air/N ₂)	430/410	620	1,000	750	870	1,260	1,230	1,310	1,660
Max. Temp (°C) *	350	350	350	350	350	350	350	350	350
Accuracy of Temp. Controller(°C)	+/-0.1								
Profile Change Time (min)	5 - 15								

PCB Support									
Single Lane / MeshBelt*	50 - 560 , Option 50 - 610								
Dual Lane in Single Lane Mode*	50 - 400, Option 50 - 450								
Dual Lane in Dual Lane Mode*	50 - 225, Option 50 - 250								
Dual Lane Rails*	FMMM, FMMF, FMFM								
PCB Direction	L to R, R to L								
PCB Top/Bottom Clearance (mm)*	Mesh belt: +58 Chain: +29/-29 & +35 /-35								
Transportation Height (mm)*	Mesh belt: 930+/-60 Chain: 960+/-60, Option 900+/-60								
Conveyor Speed (mm/min)*	250 - 1,880								
Length of PCB Support Pins (mm)*	4.75								
Auto Lubrication System	S								
Power Width Adjustment	S								
KIC Profiling Software	S								

*Other Special Option is possible

** Varies with PPM, PCB size and oven configuration

S: Standard



Why Partner with HELLER?

Market Leader

In Soldering and Curing Systems for SMT and Semi-Con. Worldwide Footprint - Be Global and Local ("Glocal")

Advanced Technology

Extendable to Future Applications
Extensive Library of Tested Designs
Generated from Semi-Con



Strong Capability

To Innovate and Customize Quickly for Applications. Easy to Work With

Green Technology

Environmentally Conscious /
Sustainability Focus and Designs




HELLER Industries was founded in 1960 and pioneered convection reflow soldering in the 1980s. Over the years, Heller has partnered with its customers to continually refine the systems to satisfy advanced applications requirements. By embracing challenge and change, Heller has earned the position of World Leader in Reflow Technology.

With the Largest Engineering Team in the industry, HELLER has the capability to quickly deliver special thermal processing solutions and provide your businesses with a competitive advantage!



A Continuous Investment in Engineering Manpower Drives the Technology...

Engineers

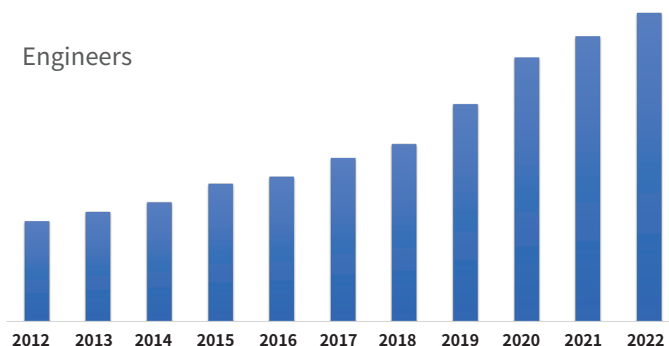

Heller Industries, Inc.

USA

Eastern Office Tel: +1 973 377 6800
Western Office Tel: +1 512 567 4371
info@hellerindustries.com

4 Vreeland Road
Florham Park, New Jersey 07932

Korea

Office Tel: +82 31 769 0808
info@hellerindustries.co.kr

125-5, Saneop-ro 156 Beon-gil,
Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea

China

Office Tel: +86 21 6442 6180
info@hellerindustries.com.cn

No.227, Minqiang Road,
Songjiang District,
Shanghai, China 201612

Taiwan

Office Tel: +886 3 4757585
info@hellerindustries.com.cn

No.6, Lane 740, Gaoshi Road,
Yangmei District, Taoyuan City, Taiwan, China

Europe

Office Tel: +441 16 223 8107
info@hellerindustries.com

Japan

Office Tel: +81 3 6717 4001
info@hellerindustries.com



www.hellerindustries.com